



HOSHIZAKI




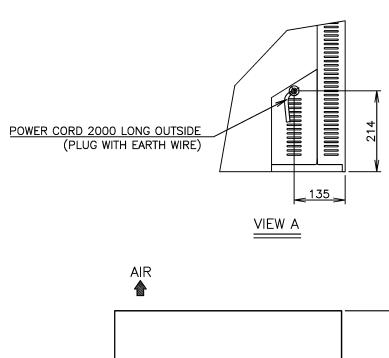


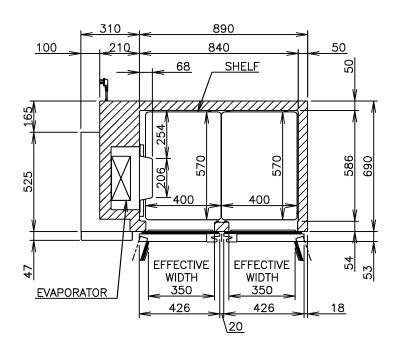

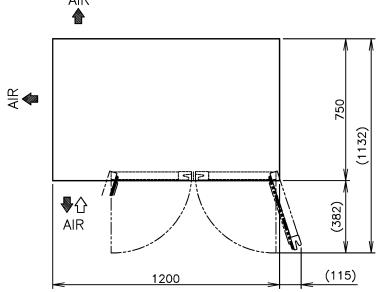

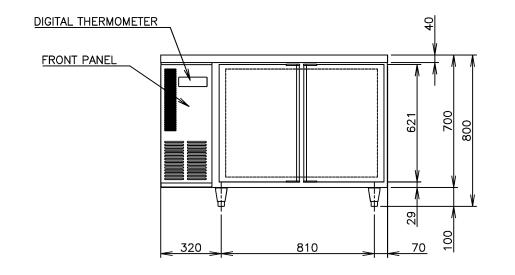

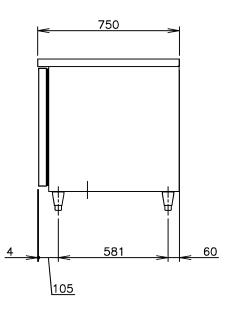

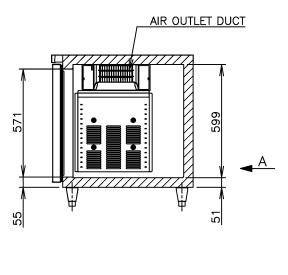

ITEM	Hoshizaki Undercounter Refrigerator					
MODEL	RT-128MA-T					
POWER SUPPLY	1 Phase 220 ~ 240V 60Hz Capacity: 0.5kVA (2.5A)					
AMPERAGE	Rated 2.0A					
ELECTRIC CONSUMPTION	Motor 240W Heater 187W Refrigeration 245W Defrost 187W					
HEAT REJECTION	*W					
POWER CORD	2.0m (Plug with Earth Wire)					
EFFECTIVE CAPACITY	307L					
OUTSIDE DIMENSIONS	1200mm (W) x 750mm (D) x 850(-880) mm (H)					
INSIDE DIMENSIONS	840mm (W) x 586mm (D) x 599mm (H)					
EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom) ABS Plastic (Top & Bottom on Door)					
INTERIOR	Stainless Steel, ABS Plastic (Door)					
INSULATION	Polyurethane Foam					
INSULATION FOAM BLOWING AGENT	Cyclopentane					
REFRIGERATION SYSTEM	Forced Air Circulation					
DEFROST SYSTEM	Glass Tube Heater					
COMPRESSOR	Hermetic					
CONDENSER	Wire and Tube type, Air—cooled					
EVAPORATOR	Fin and Tube Type					
REFRIGERANT	R134a					
TEMPERATURE CONTROL	Microprocessor (Digital Temp Indication) Adjustable from -2 to 12°C					
DEFROST CONTROL	Microprocessor controlled					
ELECTRIC CIRCUIT PROTECTION	Fuse, Earth Wire					
COMPRESSOR PROTECTION	Motor Protector					
LEG	Plastic Adjustable 90 to 120mm					
SHELF	4pcs.					
WEIGHT	Net:78kg (Gross: Approx. 83kg)					
PACKAGE	Carton 1265mm (W) x 830mm (D) x 790mm (H)					
ACCESSORIES						
OPERATING CONDITIONS	Ambient Temperature: 5—43°C Voltage Range: Rated Voltage±6%					
*We reserve the right t	o make changes in specifications and design without prior notice.					

- 1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided.
- stated in the instruction manual provided.

 Allow 10mm extra space at the installation site to meet any installation requirements(additional spacing is also required for proper air flow and pipe connections).

 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 38°C and power supply of 230V 50Hz.

 The amperage and electric consumption are based on measurements at ambient temperature of 38°C and power supply of 230V 50Hz.

 3. The cabinet temperature range of -6 to 12°C is guaranteed at ambient temperature of 35°C.

 4. Product code: T268—C200 (HTW)

APPROVED KAWAKAMI			CHECKED WANG	DESIGNED LIANG	DRAWN ZHANG		SCALE 1	/20	TRIGONOMETRY	
	##	#	A	****		DATE	2 00 47	DRAWING NO		SYMBOL
	APPROVED	VED DESIGNED SYMBOL DATE			2019.06.17		D25246			