
HOSHIZAKI

Hoshizaki Crescent Ice Maker

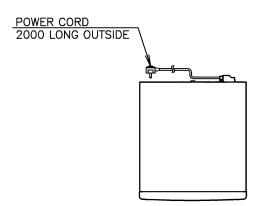


	WEIGHT	Net weight 59kg / Gross weight 74kg	ITEM	Hoshizaki Crescent Ice Mak
Λ	PACKAGE	Carton 668mm (W) x 727mm (D) x 783mm (H)		KMD-270AWB
	ACCESSORIES	Instruction Manual, Universal Brace (2), Bolt (2)	AC SUPPLY VOLTAGE	1 Phase 220—230V 60Hz
		A (angled) type plug (-C181) A (parallel) type plug (-C161)	AMPERAGE	4.5A (AT. 32°C, WT. 21°C)
		Ambient Temp.: 7-40, Water Supply Temp.: 7-35°C	STARTING AMPERAGE	26A
			ELECTRICAL	1022W (AT. 32°C, WT. 21°C)
		Voltage Range: ±6%	CONSUMPTION)N


*We reserve the right to make changes in specifications and design without prior notice. 1. Install the product properly in accordance with the instructions on location, water supply/drain


connections and electrical connections stated in the instruction and installation manuals provided. 2. The ice production depends on the ambient

and water temperatures. Refer to the instruction manual.

3. Product Code: F135

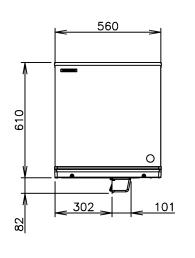

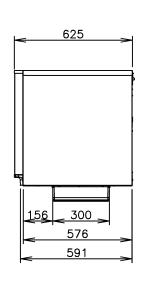

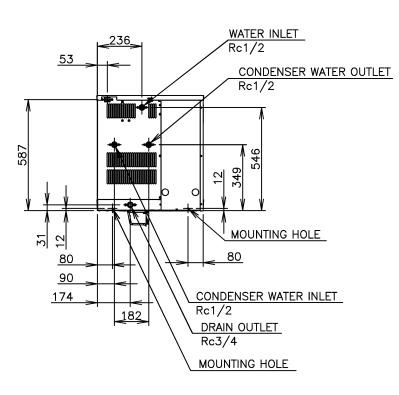

66	260	137
OPENING		376 > 1

Ж	ECKED DESIGNED	DRAWN SCALE 1 /00 TRICONOMETRY			
	LOW WATER PROTECTION	Float Switch			
	REFRIGERANT CIRCUIT PROTECTION	Auto-reset High Pressure Control Switch			
	COMPRESSOR PROTECTION	Auto-reset Overload Protector (External)			
	P.C. BOARD CIRCUIT PROTECTION	High Voltage Cut—out (Internal)			
	ELECTRICAL PROTECTION	Class I Appliance, 5A Fuse			
	BIN CONTROL SYSTEM	Mechanical Bin Switch			
	ICE MAKING WATER CONTROL SYSTEM	Timer Controlled, Overflow Pipe			
	CONTROL SYSTEM HARVESTING CONTROL SYSTEM	Hot Gas and Water, Thermistor and Timer			
	ICE MAKING	Float Switch			
	REFRIGERANT CHARGE	R404A/500g			
	REFRIGERANT CONTROL	Thermostatic Expansion Valve			
	EVAPORATOR	Water—cooled, Tube in Tube type Vertical type, Stainless Steel and Copper			
	COMPRESSOR				
	COMPRESSOR	Water Supply Harvest Cycle and Hot Gas Defrost Hermetic			
	HARVESTING SYSTEM	Vertical Evaporator with water flow on both sides			
	ICE MAKING SYSTEM	, , , , ,			
	WATER SUPPLY CONNECTIONS—DRAIN	Inlet Rc1/2 Cond. Inlet Rc1/2 (connected at rear side)			
	CONNECTIONS— ELECTRIC CONNECTIONS—	X—type Connection (With Plug)			
	INSULATION FOAM BLOWING AGENT	Cyclopentane			
	INSULATION	Polyurethane Foam			
	EXTERIOR	Stainless Steel, Plastic Frame (Front), Galvanized Steel (Rear)			
	OUTSIDE DIMENSIONS	560mm (W) x 625mm (D) x 610mm (H) (not incl. Bin Sw)			
	ICE PRODUCTION PER CYCLE	Approx. 5.0kg/572pcs (AT. 21°C, WT. 15°C)			
	FREEZE CYCLE TIME	Approx. 23.5Min (AT. 21°C, WT. 15°C)			
	SHAPE OF ICE	Crescent Cube			
	CONDENSER WATER CONSUMPTION PER 24h	Approx. 1.18m³/d (AT. 10°C, WT. 10°C) Approx. 1.51m³/d (AT. 21°C, WT. 15°C) Approx. 2.02m³/d (AT. 32°C, WT. 21°C)			
	POTABLE WATER CONSUMPTION PER 24h	Approx. 0.49m³/d (AT. 21°C, WT. 15°C) Approx. 0.44m³/d (AT. 32°C, WT. 21°C)			
	PER 24h	Approx. 275kg/d (AT. 21°C, WT. 15°C) Approx. 265kg/d (AT. 32°C, WT. 21°C) Approx. 0.60m³/d (AT. 10°C, WT. 10°C)			
	CAPACITY ICE PRODUCTION	Approx. 285kg/d (AT. 10°C, WT. 10°C)			
÷.	POWER FACTOR POWER SUPPLY				
<i>_</i>	CONSUMPTION	1022W (AT. 32°C, WT. 21°C)			
-)	STARTING AMPERAGE ELECTRICAL	26A			
	CTADTING ANDEDAGE	4.5A (A1. 52 C, W1. 21 C)			